


Attaching sweeper Optimal 2300 - front or rear

- > sweeping roller height adjustable via slot and lever (depending on wear)
- > low-wear plastic skids protect collection trough
- > free sweeping by pulling up the collecting trough possible (no disassembly required!)
- > third guide wheel on the front version prevents the machine from buckling up
- > Attachable sweeper „Optimal“ as front version optionally available with additional side brush

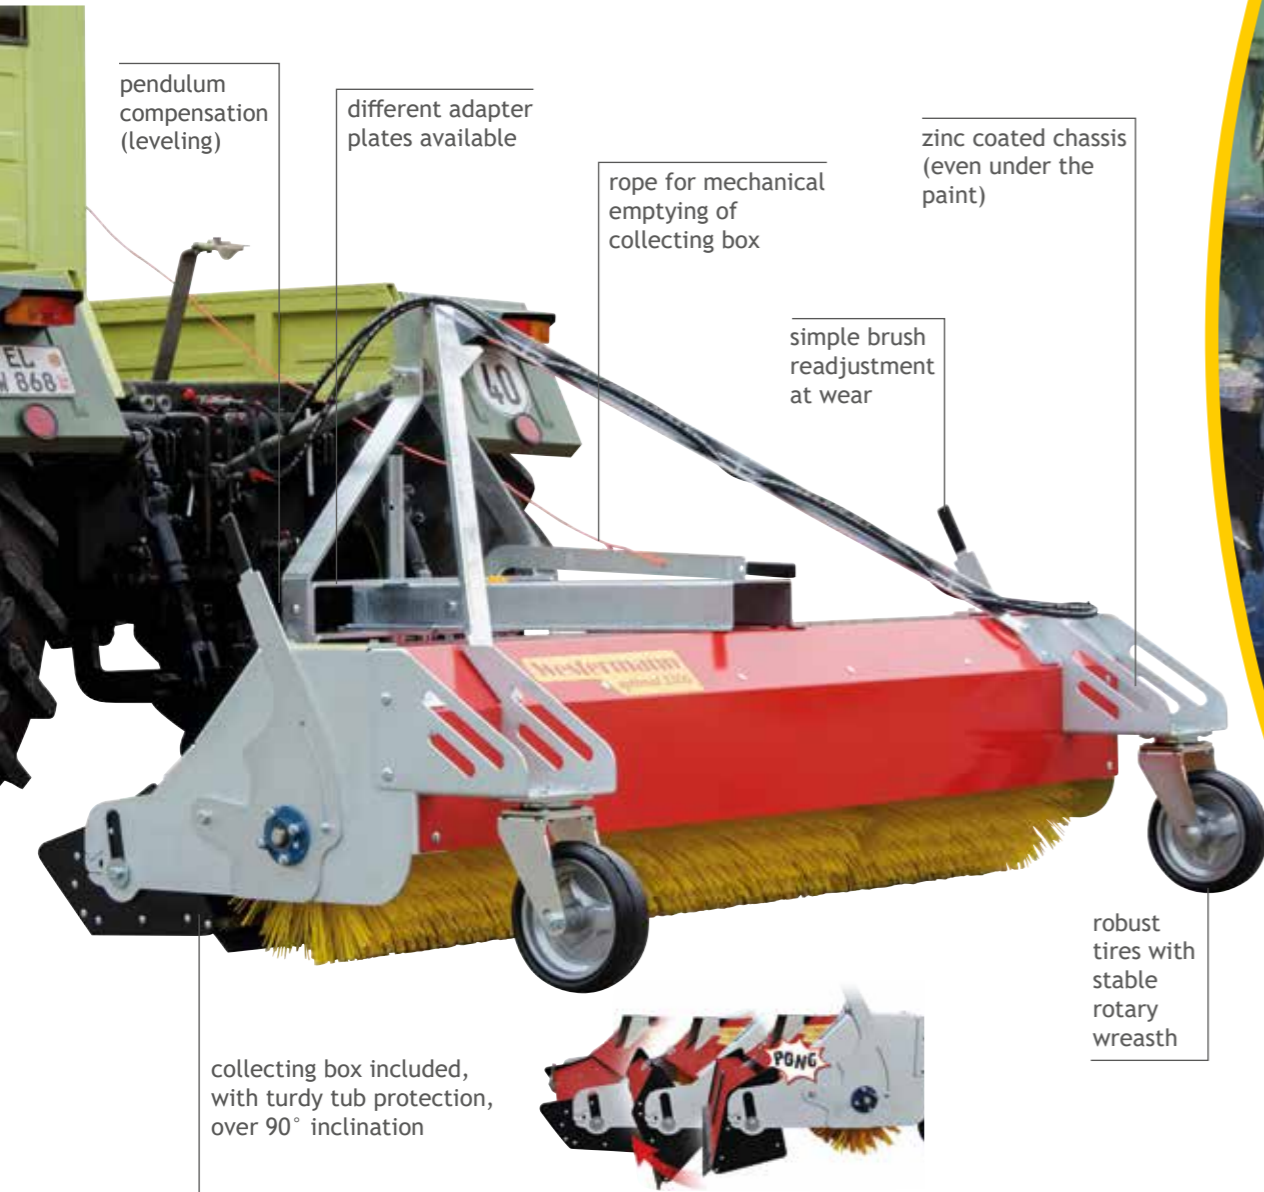

Sweeping technology for large areas.

	Optimal 2300
Working width	2300 mm
Brush diameter	520 mm
Depth of collecting box	360 mm
Emptying of collecting box	mechanically, hydraulically possible (surcharge)
Swiveling	mechanically, hydraulically possible (surcharge)
Drive	Gerotormotor
Tires	2 with rear attachment, 3 with front attachment
Flow rate	20 - 50 l/min.
Recommended speed	approx. 200 l/min.
max. operating pressure	180 bar
Weight	approx. 315 kg
Mounting options	via adapter plates as rear or front attachment to various carrier vehicles

(Technical data is approximate and non-binding.)

